




Battery Connector

Prerequisite Only: Disconnect the battery in an iPhone 6s to safely perform repairs.

Written By: Evan Noronha

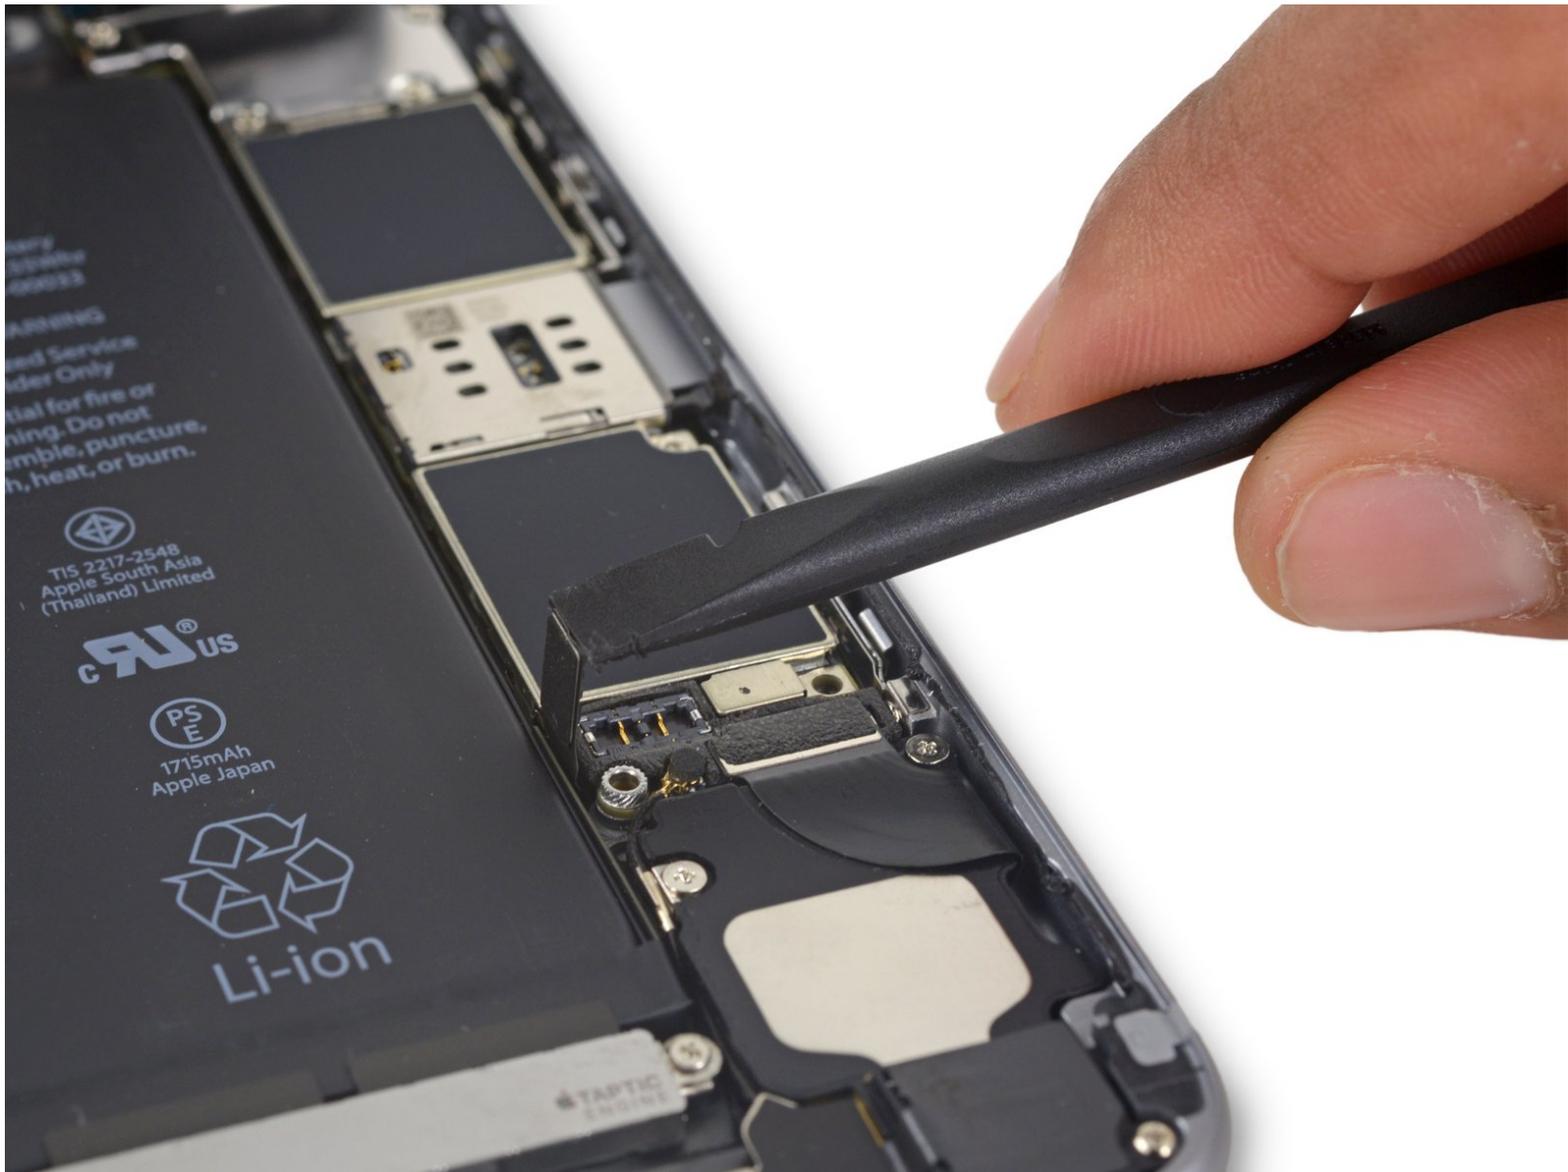

INTRODUCTION

Prereq Only: Disconnect the battery in an iPhone 6s.

TOOLS:

- [Spudger](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Battery Connector



- Remove two Phillips screws securing the battery connector bracket, of the following lengths:
 - One 2.9 mm screw
 - One 2.2 mm screw
- ⓘ Throughout this repair, [keep track of each screw](#) and make sure it goes back exactly where it came from to avoid damaging your iPhone.

Step 2




- Remove the battery connector bracket from the iPhone.

Step 3



- Use the point of a spudger to disconnect the battery connector by prying it straight up from the logic board.

Step 4

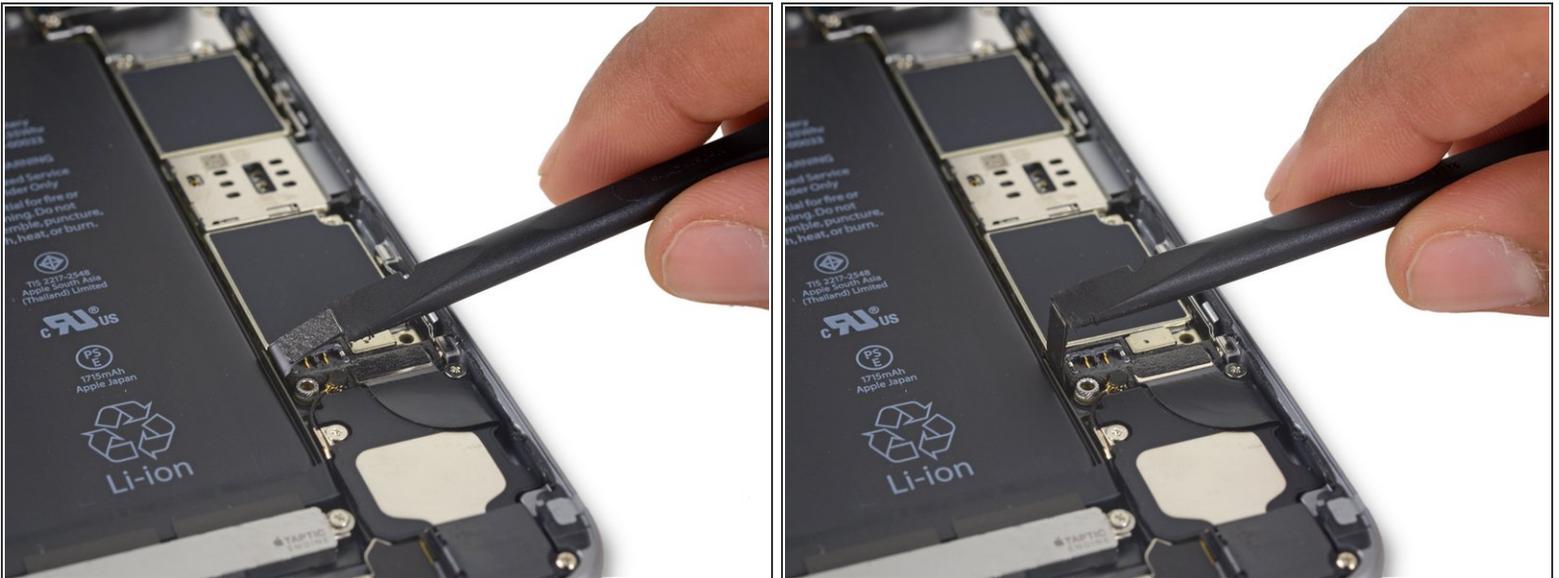

- Push the battery connector away from the logic board until it stays separated from its socket, so as to avoid any accidental connection to the battery while you work.

To reassemble your device, follow these instructions in reverse order.