



2002-2006 Toyota Camry Passenger Side View Mirror Replacement

Replace a passenger side view mirror on a 2002-2006 Toyota Camry, USA built model.

Written By: Alexandria Golden



INTRODUCTION

Use this guide to replace a passenger side mirror on a 2002-2006 Toyota Camry, USA built model.

Side view mirrors are mirrors on the exterior of the vehicle. They are designed to assist the driver's view of what is behind or beside their vehicle. When damaged, the mirror's reflective surface can be distorted and may no longer adjust properly.

In step 4 of this guide, you will be loosening the three 10mm bolts to remove the passenger side mirror. The three bolts are keeping the side mirror mounted to the car, so make sure you have a firm grip on the side mirror before loosening them. If the side mirror is dropped the glass may shatter or the car may get scratched. Use the same caution on step 6 when you mount the replacement side mirror.



TOOLS:

- [Flathead Screwdriver](#) (1)
- [10mm Socket](#) (1)
- [Ratchet Extension](#) (1)



PARTS:


- [Non folded, Heated 2002-2006 Toyota Camry Passenger Side](#) (1)

Step 1 — Passenger Side View Mirror



- Remove the trim paneling located at the base of the side view mirror.
- i** It should detach rather easily with just the use of your hands. If not, place the tip of the flat head screwdriver into the gap and gently pry the paneling off.

Step 2

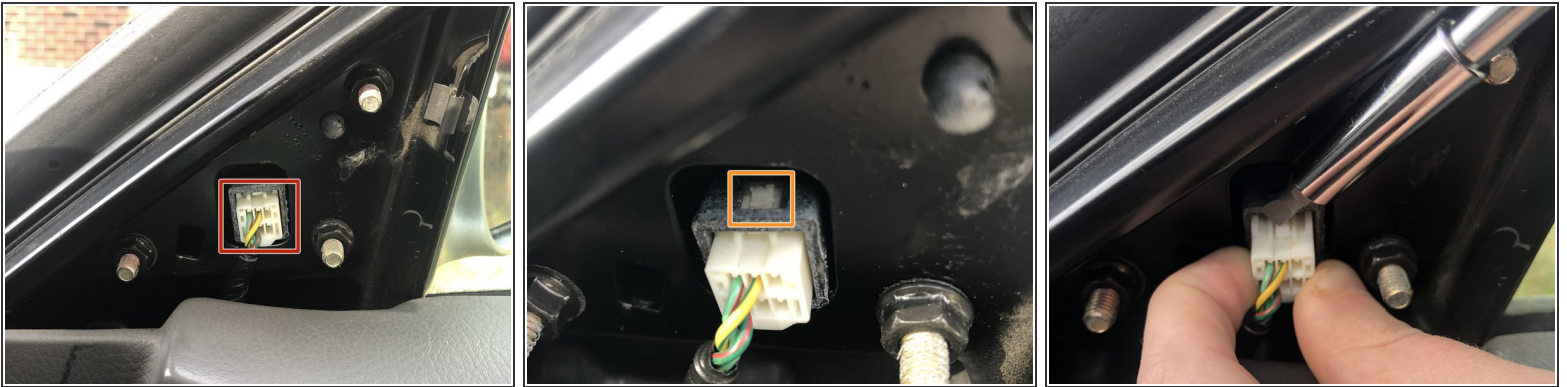

- Begin to disconnect the electrical connector located in the center of the three 10mm bolts.
- You can find the lock pad by locating the release tab on the top of the electrical connector.
- Use your flat head screwdriver to push in on the lock pad. Then, press in on the electrical connector

Step 3



- Detach the electrical connector completely. Place your flathead screwdriver in the gap to gain leverage and pull on the connector.

☑ Be careful not to pull on the wires.

Step 4




- Remove the three 10mm bolts using your 10mm socket and ratchet extension.

⚠ Ensure you are holding the mirror so it does not fall to the ground while removing the bolts.

Step 5




- Remove the side view mirror.


 Keep a firm grip so the side mirror is not dropped and no glass is shattered.

Step 6



- Mount the replacement side view mirror.

 Make sure it is flush with the car.

 Continue to hold the replacement side mirror in place until you have tightened the 10mm bolts enough to keep it mounted.

To reassemble your device, follow these instructions in reverse order.