



How to remove the 2010-2017 Suzuki Swift front bumper

This technique will show you how to remove the front bumper of a 2010-2017 Suzuki Swift.

Written By: knipwim



INTRODUCTION

The front bumper needs to be removed to perform maintenance on some parts of the vehicle that may not be accessible just by opening the hood. This guide will show you how to unclip and remove your front bumper!



If you are replacing your front bumper, don't forget to install the license plate.



TOOLS:

- [10mm Socket](#) (1)
 - [PH1 Socket](#) (1)
 - [Flathead 4 mm Screwdriver](#) (1)
 - [3/8" Drive Ratchet](#) (1)
-

Step 1 — remove the top fasteners

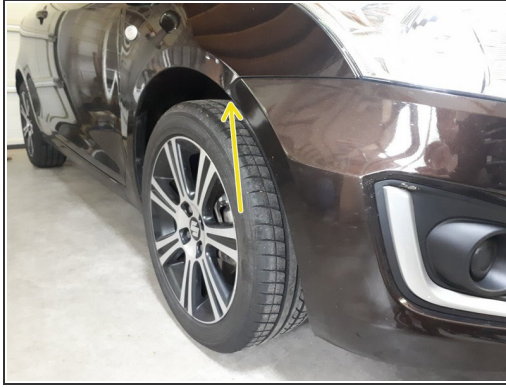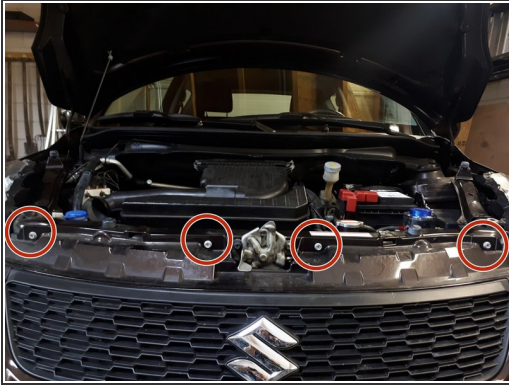

- Open the hood and unscrew the 10mm bolts located at the top.
- Unscrew the screw located at the side top corner under the fender, repeat on the other side.

Step 2 — remove bottom fasteners




- Unscrew 4 screws located underneath the front of the front bumper.
- With the flathead, unclip the 2 push rivets underneath the side of the front bumper, disconnecting each fender from the bumper.
- Repeat on the other side.

Step 3 — detach top corners



- Gently, pull the side corner loose.
- Pull from the car and slightly downwards to detach the remaining corner.
- Repeat on the other side.

Step 4 — unlatch the bumper

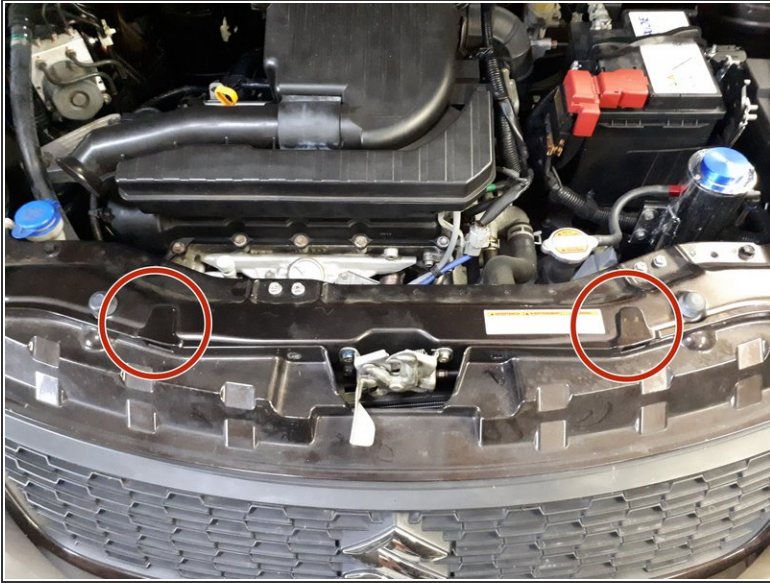

i If your car has fog lights, make sure you disconnect them from the car's wiring.

- The bumper is now only attached with 2 clips at the top.
- Push the front of each clip towards the car and unlatch it.

Step 5 — remove the bumper



- Hold the bumper in the center and remove it by moving it down and outwards.

⚠ The bumper wraps around the bottom and fender parts, take care not to damage anything when removing the bumper.

- Some of the 4 bottom nut clips might move or detach entirely when removing the bumper. Ensure these are at their correct positions.

To reassemble your device, follow these instructions in reverse order.