

MSI GS63VR 6RF Stealth Pro WiFi Card Replacement

If you're having connectivity issues with your...

Written By: Nabil Ranjbar



INTRODUCTION

If you're having connectivity issues with your Stealth Pro, or simply want to upgrade your connectivity, this guide will walk you through the replacement process.

TOOLS:

Heavy-Duty Spudger (1)
Phillips #00 Screwdriver (1)
Tweezers (1)

Step 1 — Wi-Fi Card








- First, turn off the laptop and make sure it is unplugged from power to avoid injury.
- Unscrew the 15 screws on the bottom panel of the computer using a Phillips #00 screwdriver.
- Lift open the back cover with a plastic spudger.
- Gently lift the back cover away from computer. Make sure nothing is attached.
- Unplug the battery cable from the motherboard to prevent a ground fault.
- ⚠ Too much pressure from the spudger can break the clips that secure the back panel, but some flex is not dangerous.

Step 2



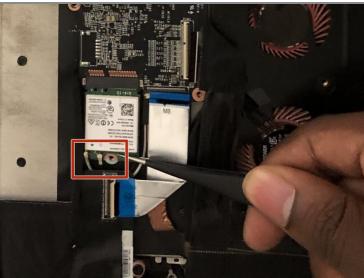

- Unscrew the single screw from the Wifi card using a Phillips #00 screwdriver.
- Apply upward pressure on the cables using a plastic tweezer.
- Using the plastic <u>tweezers</u>, carefully grab and gently wiggle the Wifi card out of its socket.
- Gently pull the card upward from the slot.

⚠ The Wi-Fi cables can be easily damaged when removing or replacing the connectors. Please take extra care when performing these tasks