




Lenovo ThinkPad Yoga Keyboard Replacement

How to replace the keyboard in a Lenovo...

Written By: Felicia McCarey

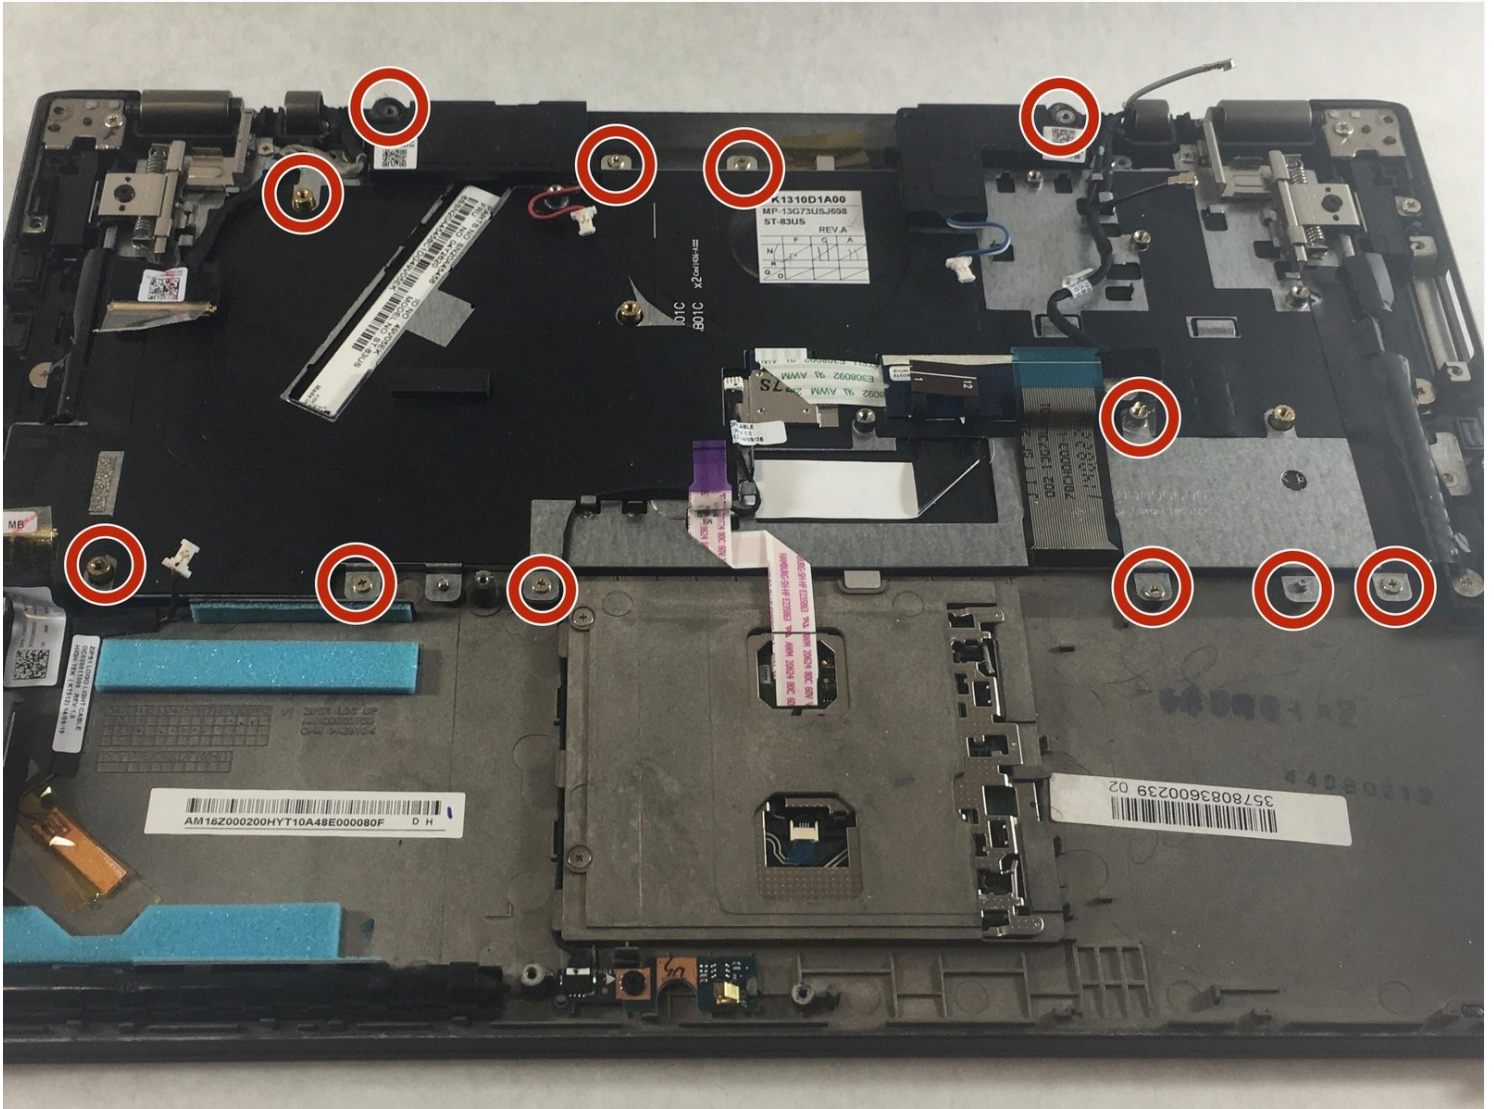

INTRODUCTION

How to replace the keyboard in a Lenovo ThinkPad Yoga 2013. This guide will help you to successfully replace your keyboard.



TOOLS:

[iFixit Opening Tool](#) (1)
[Phillips #1 Screwdriver](#) (1)
[Spudger](#) (1)

PARTS:




[04Y2623 - Lenovo Laptop Keyboard - Genuine](#) (1)

Step 1 — Battery

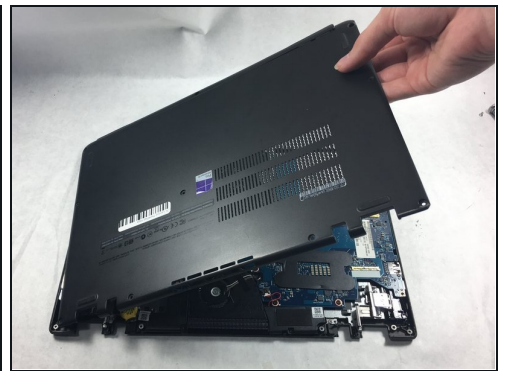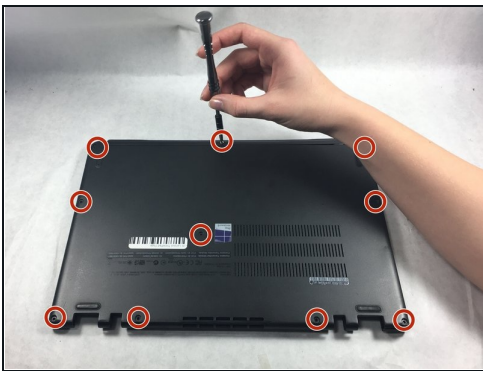




- Flip the laptop over so the bottom is facing you.
- Remove the ten screws using a Phillips #1 screwdriver.
- Using the plastic opening tool, pry the bottom cover off the laptop.

Step 2

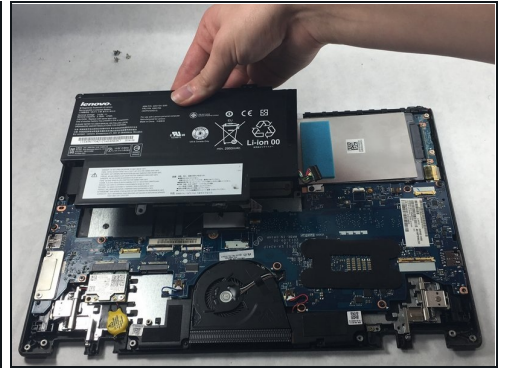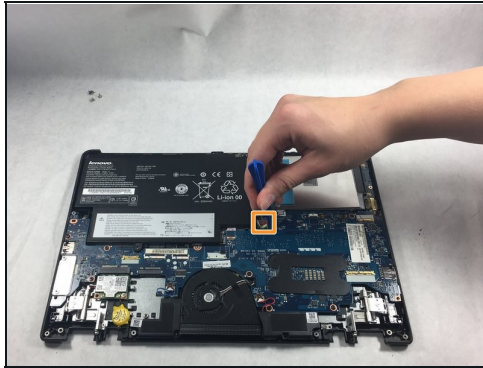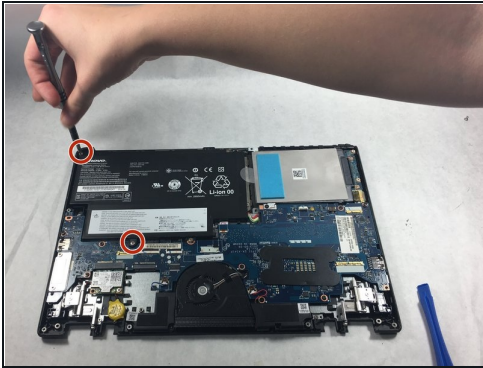




- Remove two screws from the battery using a Phillips #1 screwdriver.
- Disconnect the battery connector from the motherboard.
- Remove the battery from the laptop.

Step 3 — Speakers

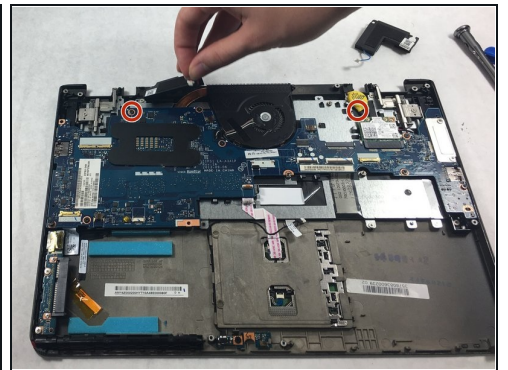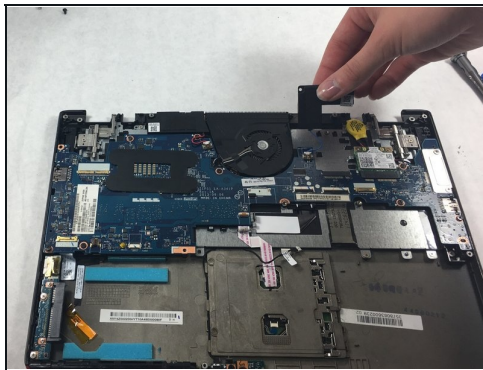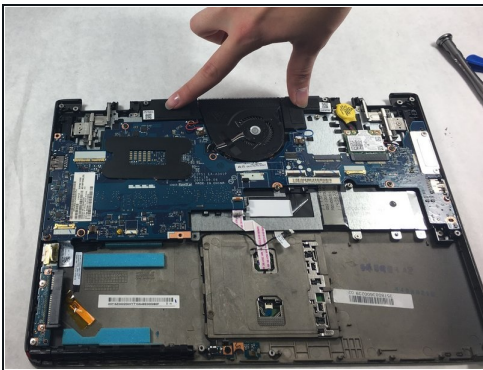


- Disconnect connectors. Use fingers to pinch and pull the connector out.

Step 4 — Fan

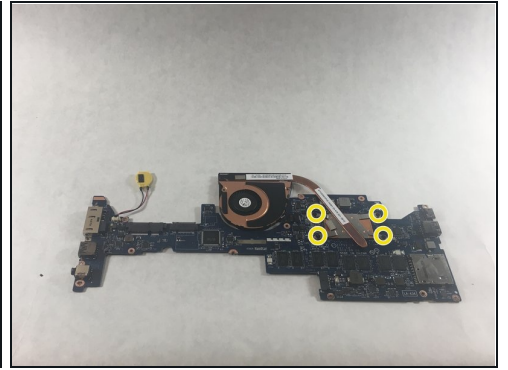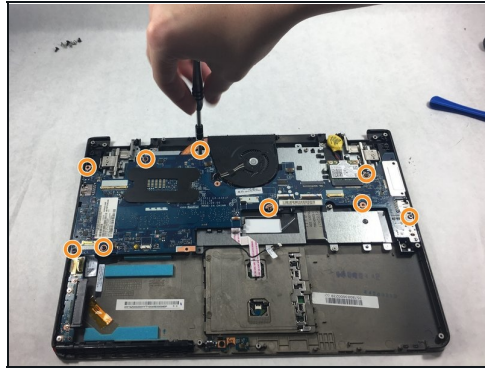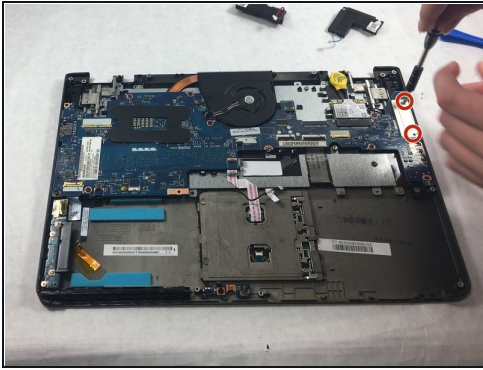


- Remove the two screws from the retainer for the ports using a Phillips #1 screwdriver.
- Remove the nine screws from the motherboard using a Phillips #1 screwdriver.
- Remove the four screws from the fan under the motherboard using a Phillips #1 screwdriver.
- Remove the fan from the motherboard.

Step 5 — Keyboard

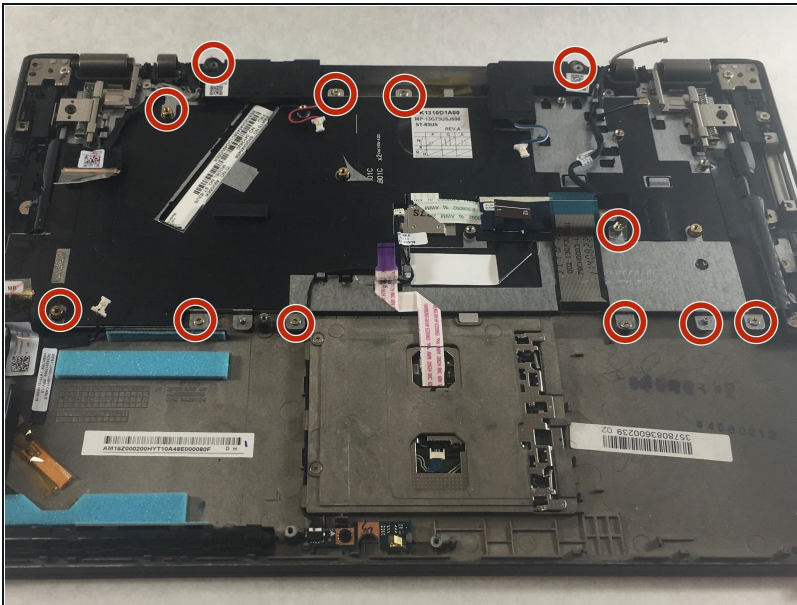


- Remove twelve screws from the midframe using a Phillips #1 screwdriver.

Step 6

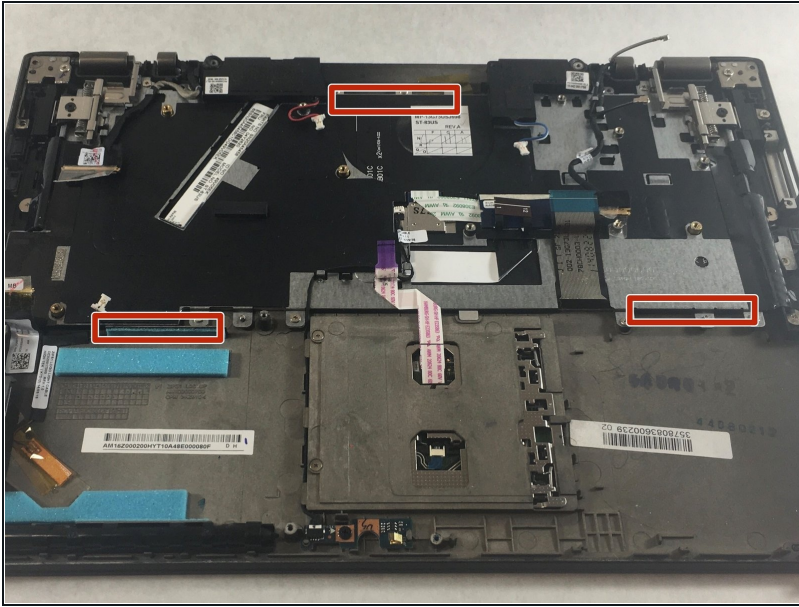

- Use a spudger to pry open the keyboard panel.
- Continue to pry until the panel is loose enough to take off.

Step 7

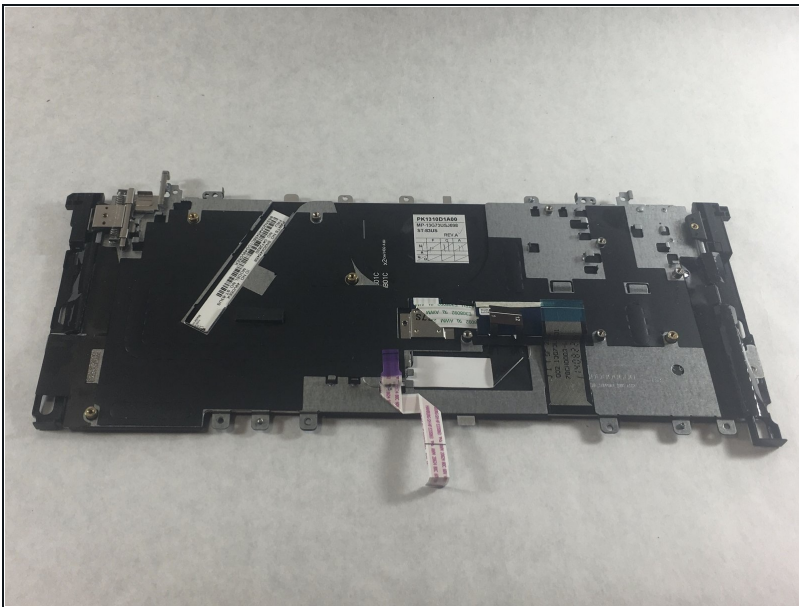

- Remove the keyboard from the laptop.

To reassemble your device, follow these instructions in reverse order.